
# Modular control panel M-SHEV-12-AP

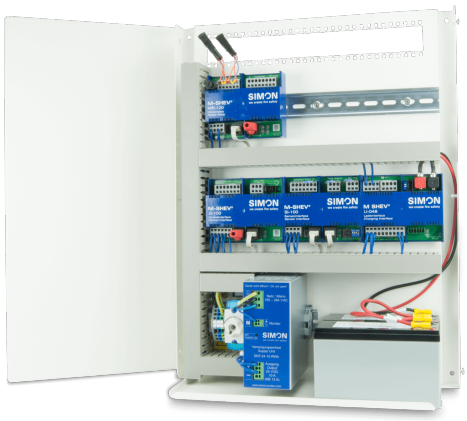

## Technical Data

| | |
|---|---|
| Input voltage | 230 V AC |
| Output voltage | 24 V DC |
| Output current | 12 |
| SHE Groups | 1 |
| Ventilation groups | 1 |

## TECHNICAL DATA

| | |
|---|---|
| Matchcode | M-SHEV-12-AP |
| Article name | Modular control panel M-SHEV-12-AP |
| Part number | ST4 3460 |
| Input voltage | 230 V AC |
| Output voltage | 24 V DC |
| Output current | 12 |
| Classification | CE certified EN 12101-10, tested ISO 21927-9 |
| LED signs | LED display operating status network: Permanent display green - mains available LED display operating status lead acid battery ("O.K."): Continuous green - battery is present and charging (charge is being maintained) |
| IP code | IP20 |
| SHE Groups | 1 |
| Ventilation groups | 1 |
| Weight | 14.3 |
| Housing | Sheet steel case |
| Housing type | Steel case |
| Colour | RAL 9010 |
| Housing width | 400 |
| Housing height | 516 |
| Housing depth | 155 |
| Appliance class | I |
| Environment temperature range | -5°C - +40°C |
| Packaging part no. | N-99-128 |

## ACCESSORIES

| Part no. | Matchcode | |
|---|---|---|
| ST4 10120 | Pb-battery-7Ah | |
| ST4 10121 | pb-battery-12ah | |
| ST4 10122 | pb-battery-17ah | |
| ST4 10123 | pb-battery-24ah | |
| ST4 10124 | Pb battery 38 Ah | |
| ST4 3321 | Flange plate 445-130 plastic | |

| | |
|---|---|
| ST4 3322 | Flange plate 345-130 plastic |
| ST4 3323 | Flange plate 545-130 plastic |
| ST4 3344 | HR-820-MS |
| ST4 33516 | AP-MOUNT |
| ST4 3380 | ZI-100 |
| ST4 3381 | SI-100 |
| ST4 3382 | MI-100 |
| ST4 3383 | MR-120 |
| ST4 3385 | BI-100-MB |
| ST4 3386 | SI-100-MASTER |
| ST4 3389 | BI-100-KNX |