




### Technical Data



Input voltage	24 V DC
Nominal current	1.9
Running speed	11
IP code	IP32
Switch on duration	30

### MOUNTING POSITIONS

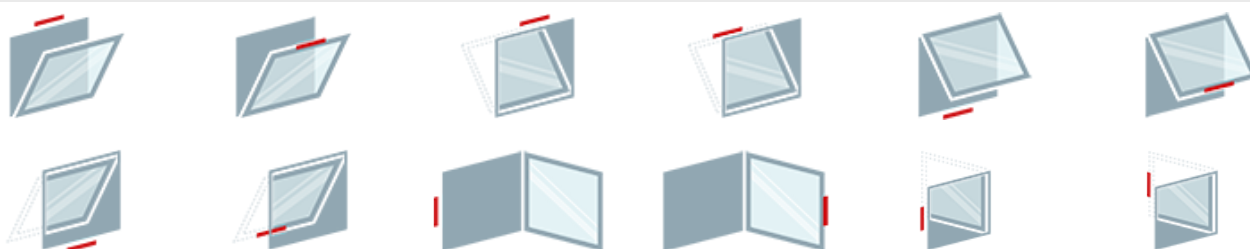

### TECHNICAL DATA

Matchcode	PA-K-65/300-S
Article name	Chain actuator PA-K-65/300-S
Part number	M2 2241 S
Input voltage	24 V DC
Nominal current	1.9
Input voltage range	- 15 % / + 15 %
Stroke	300
Push force	650
Pull force	650
Nominal locking force	< 3000 N
Cut-Off	Integrated electronic overload cut-off
Running speed	11
IP code	IP32
Switch on duration	30
Mounting way	aufgesetzt
Weight	1.81
Housing	Aluminium profile housing EV1 anodized
Housing type	Aluminium
Colour	On request
Housing length	482
Housing width	50
Housing height	41
Appliance class	III
Connection cable	Silicone connection cable 3 x 0.75 mm <sup>2</sup> (length 3,000 mm)
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein

Customs tariff no

84798997

**ACCESSORIES**

Part no.	Matchcode	
<a href="#">K2 5088</a>	<a href="#">K-K50-SKI</a>	
<a href="#">K2 5089</a>	<a href="#">K-K50-OK</a>	
<a href="#">K2 5090</a>	<a href="#">K-K50-AKI</a>	
<a href="#">K2 5092</a>	<a href="#">K-K50-A</a>	
<a href="#">K2 5093</a>	<a href="#">K-K50-K</a>	
<a href="#">K2 5094</a>	<a href="#">K-K50-FLEX</a>	
<a href="#">K2 5106</a>	<a href="#">K-K-OK-SK</a>	
<a href="#">SD1 8513</a>	<a href="#">SICO-LINK-USB-110</a>	
<a href="#">SD1 8522</a>	<a href="#">SICO-LINK-Adapter</a>	
<a href="#">SD1 8525</a>	<a href="#">SICO-PLUCKER</a>	