




## **Technical Data**

SIC2 22	4 C 3 DIN EN 12101-2
Input voltage	24 V DC
Nominal current	1.1
Running speed	7.6
IP code	IP54
Switch on duration	30

## **MOUNTING POSITIONS**

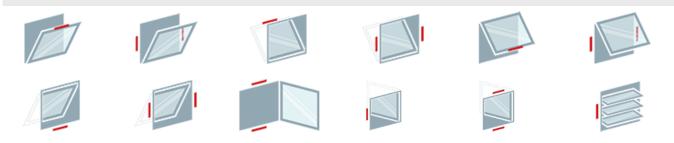

## **TECHNICAL DATA**

Matchcode Article name Part number Input voltage Nominal current Input voltage range Networked standby Stroke Push force Pull force Nominal locking force Cut-Off Running speed IP code Switch on duration Mounting way Weight Housing

Housing type Colour Housing length Housing height Diameter Appliance class Connection cable PA-L-75/1000 Linear actuator PA-L-75/1000 M2 2415 24 V DC 1.1- 15 % / + 15 % 0.9 W (1 min) 1000 750 750 1000 integrated electronic overload cut-off 7.6 IP54 30 aufgesetzt 3.55 end-to-end aluminium profile tube, anodized in E6/EV1 with integrated retainer for flexible bracket system Aluminium On request 1387 42 36 Ш SICO PLUG connection. Excluding connection cable / set.



Nominal working temperature Environment temperature range Brackets included Customs tariff no 20 -5 °C - 75 °C nein 84798997

ACCESSORIES	
Part no.	Matchcode
<u>K2 1501</u>	OK
<u>K2 1502</u>	DAS
<u>K2 1505 A</u>	<u>UKU-740</u>
<u>K2 1506</u>	<u>AW 100-6</u>
<u>K2 1506 A</u>	<u>AW 100-6-A</u>
<u>K2 1507 A</u>	<u>AW 150-6</u>
<u>K2 1507 B</u>	<u>AW 150-6-A</u>
<u>K2 1519 A</u>	<u>AW 250-6</u>
<u>K2 1539</u>	<u>HK-L</u>
<u>K2 1562</u>	<u>UK-L</u>
<u>K2 1563</u>	<u>K-L-UK-J</u>
<u>K2 1576</u>	K-L-RAICO105D-RE-9006 (rechts)
<u>K2 1577</u>	K-L-RAICO105D-LI-9006 (links)
<u>K2 1601</u>	K-L-A-LI-AW57RO
<u>K2 1603</u>	K-L-A-RE-AW57RO
<u>K2 2004</u>	PA-ANL-3m
<u>K2 2005</u>	PA-ANL-5m
<u>K2 2006</u>	PA-ANL-+Ifm
<u>K2 2007</u>	PA-SICO-SET-3m
<u>K2 2008</u>	PA-SICO-SET-5m
<u>K2 2009</u>	PA-SICO-SET-+lfm
<u>SD1 8522</u>	SICO-LINK-Adapter
<u>SD1 8525</u>	SICO-PLUCKER