




Technical Data

	DIN EN 12101-2
Input voltage	24 V DC
Nominal current	1.1
Running speed	7.6
IP code	IP54
Switch on duration	30

MOUNTING POSITIONS

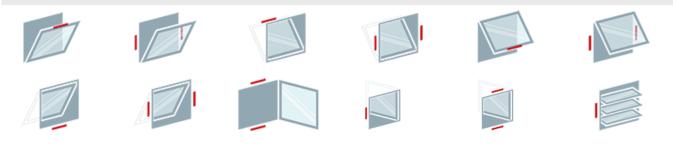

TECHNICAL DATA

Matchcode	PA-L-75/500-S
Article name	Linear actuator PA-L-75/500-S
Part number	M2 2413 S
Input voltage	24 V DC
Nominal current	1.1
Input voltage range	- 15 % / + 15 %
Networked standby	0.9 W (1 min)
Stroke	500
Push force	750
Pull force	750
Nominal locking force	1000
Cut-Off	electronic and sequence signal "F"
Running speed	7.6
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	2.2
Housing	end-to-end aluminium profile tube, anodized in EV1
Housing type	Aluminium
Colour	On request
Housing length	887
Housing height	42
Diameter	36
Appliance class	
Connection cable	SICO PLUG connection. Excluding connection
	cable / set.
Nominal working temperature	20



Environment temperature range Brackets included Customs tariff no -5 °C - 75 °C nein 84798997

ACCESSORIES	
Part no.	Matchcode
<u>K2 1501</u>	<u>OK</u>
<u>K2 1502</u>	DAS
<u>K2 1505 A</u>	<u>UKU-740</u>
<u>K2 1506</u>	<u>AW 100-6</u>
<u>K2 1506 A</u>	<u>AW 100-6-A</u>
<u>K2 1507 A</u>	<u>AW 150-6</u>
<u>K2 1507 B</u>	<u>AW 150-6-A</u>
<u>K2 1519 A</u>	<u>AW 250-6</u>
<u>K2 1539</u>	<u>HK-L</u>
<u>K2 1562</u>	<u>UK-L</u>
<u>K2 1563</u>	K-L-UK-J
<u>K2 1576</u>	K-L-RAICO105D-RE-9006 (rechts)
<u>K2 1577</u>	K-L-RAICO105D-LI-9006 (links)
<u>K2 1601</u>	K-L-A-LI-AW57RO
<u>K2 1603</u>	K-L-A-RE-AW57RO
<u>K2 2004</u>	PA-ANL-3m
<u>K2 2005</u>	PA-ANL-5m
<u>K2 2006</u>	PA-ANL-+Ifm
<u>K2 2007</u>	PA-SICO-SET-3m
<u>K2 2008</u>	PA-SICO-SET-5m
<u>K2 2009</u>	PA-SICO-SET-+lfm
<u>SD1 8522</u>	SICO-LINK-Adapter
<u>SD1 8525</u>	SICO-PLUCKER