

Slit actuator PA-LSA-75/300-S

Technical Data
















24 V DC Input voltage

Nominal current 1.1 Running speed 7.6 IP code IP54

Switch on duration 30

MOUNTING POSITIONS

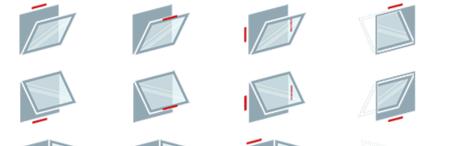















TECHNICAL DATA

Matchcode PA-LSA-75/300-S Article name Slit actuator PA-LSA-75/300-S Part number M2 2472 S A 24 V DC Input voltage Nominal current 1.1 - 15 % / + 15 % Input voltage range Networked standby 0.9 W (1 min) 281

Stroke Push force 750 750 Pull force Nominal locking force 1000

Cut-Off Integrated electronic overload cut-off

Running speed 7.6 IP code IP54 Switch on duration 30

Mounting way aufgesetzt 2.1

Weight

End-to-end aluminium profile tube, anodized in Housing E6/EV1 with integrated retainer for flexible

bracket system Aluminium Housing type Colour On request

Housing length 635 Housing height 42



Slit actuator PA-LSA-75/300-S

Diameter 36 Appliance class III

Connection cable SICO PLUG connection. Excluding connection

cable / set.

Nominal working temperature Environment temperature range

Brackets included
Customs tariff no

20 -5 °C - 75 °C

nein 84798997

ACCESSORIES

ACCESSORIES	
Part no.	Matchcode
<u>K2 1501</u>	<u>OK</u>
<u>K2 1502</u>	<u>DAS</u>
<u>K2 1505 A</u>	<u>UKU-740</u>
<u>K2 1539</u>	<u>HK-L</u>
K2 1562	<u>UK-L</u>
<u>K2 1563</u>	K-L-UK-J
<u>K2 2004</u>	PA-ANL-3m
<u>K2 2005</u>	PA-ANL-5m
<u>K2 2006</u>	PA-ANL-+Ifm
K2 2007	PA-SICO-SET-3m
K2 2008	PA-SICO-SET-5m
<u>K2 2009</u>	PA-SICO-SET-+lfm
SD1 8522	SICO-LINK-Adapter
SD1 8525	SICO-PLUCKER