

## Slit actuator PA-LS-75/300-S

#### **Technical Data**

Switch on duration







30








24 V DC Input voltage

Nominal current 1.1 Running speed 7.6 IP code IP54

#### **MOUNTING POSITIONS**

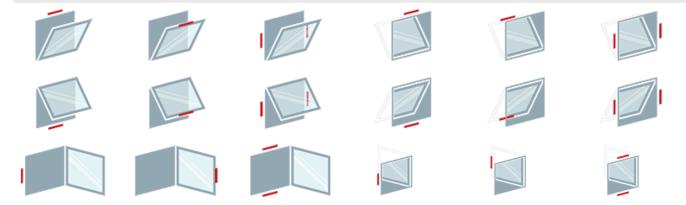

#### **TECHNICAL DATA**

Matchcode PA-LS-75/300-S Article name Slit actuator PA-LS-75/300-S Part number M2 2472 S 24 V DC Input voltage Nominal current 1.1 - 15 % / + 15 % Input voltage range Networked standby 0.9 W (1 min) Stroke 281

Push force 750 750 Pull force Nominal locking force 1000

Cut-Off Integrated electronic overload cut-off

Running speed 7.6 IP code IP54 Switch on duration 30

Mounting way aufgesetzt 2.1

Weight

End-to-end aluminium profile tube, anodized in Housing E6/EV1 with integrated retainer for flexible

bracket system

Aluminium Housing type Colour On request 635

Housing length Housing height 42



# Slit actuator PA-LS-75/300-S

Diameter Appliance class

Connection cable

Nominal working temperature

Environment temperature range Brackets included Customs tariff no 36 III

SICO PLUG connection. Excluding connection

cable / set.

20

-5 °C - 75 °C

nein

84798997

### **ACCESSORIES**

ACCESSORIES	
Part no.	Matchcode
<u>K2 1501</u>	<u>OK</u>
<u>K2 1502</u>	<u>DAS</u>
<u>K2 1505 A</u>	<u>UKU-740</u>
<u>K2 1539</u>	<u>HK-L</u>
K2 1562	<u>UK-L</u>
<u>K2 1563</u>	K-L-UK-J
<u>K2 2004</u>	PA-ANL-3m
<u>K2 2005</u>	PA-ANL-5m
<u>K2 2006</u>	PA-ANL-+Ifm
<u>K2 2007</u>	PA-SICO-SET-3m
K2 2008	PA-SICO-SET-5m
<u>K2 2009</u>	PA-SICO-SET-+Ifm
SD1 8522	SICO-LINK-Adapter
SD1 8525	SICO-PLUCKER