




Technical Data

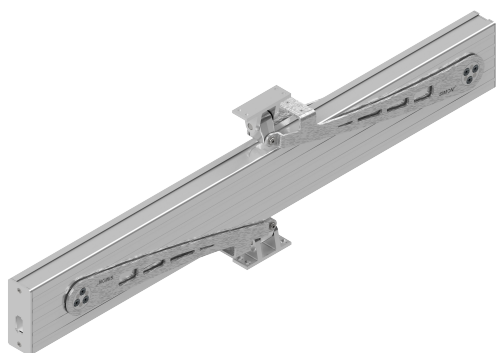

Input voltage	24 V DC
Nominal current	6.0
Running speed	14.8
IP code	IP54
Switch on duration	30

MOUNTING POSITIONS



TECHNICAL DATA

Matchcode	PA-KL ² -DUO-100/1422
Article name	Folding Arm ² PA-KL ² -DUO-100/1422
Part number	M2 2027
Input voltage	24 V DC
Nominal current	6.0
Input voltage range	- 15 % / + 25 %
Ripple	500
Stroke	1422
Push force	1000
Pull force	1000
Nominal locking force	1200
Classification	EN 12101-2, EN 60335-1, EN 60335-2-103
Cut-Off	Integrated overload cut-off with microprocessor controls
Running speed	14.8
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	10
Housing	Aluminum
Housing type	Aluminium
Colour	Alu E6/EV1
Housing length	941
Housing width	65
Housing height	153
Appliance class	III
Connection cable	SICO PLUG (Excluding connection cable / set)
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein

ACCESSORIES

Part no.	Matchcode	
K2 1608	K-KL²-M-OK	
K2 1609	K-KL²-S-OK	
K2 1617	Z-K-KL-DP25	
K2 1680	Z-K-KL2-DP5	
K2 1681	Z-K-KL2-DP10	
K2 1682	Z-K-KL2-DP17	
K2 1683	Z-K-KL2-DP22	
K2 2001	SICO-PLUG	
K2 2002	SICO-PLUG-SP	
K2 2003	PA-ANL-SIHF-6x0.5mm²	
K2 2004	PA-ANL-3m	
K2 2005	PA-ANL-5m	
K2 2006	PA-ANL-+lfm	
K2 2007	PA-SICO-SET-3m	
K2 2008	PA-SICO-SET-5m	
K2 2009	PA-SICO-SET-+lfm	
SD1 8513	SICO-LINK-USB-110	
SD1 8514	SICO-PLUG-INSTALL	
SD1 8530	Software parameterization	