

Linear actuator EA-L-450/750



Technical Data









24 V DC

Input voltage


0.5 Nominal current

Running speed 5

IP code IP54

Switch on duration 30

MOUNTING POSITIONS

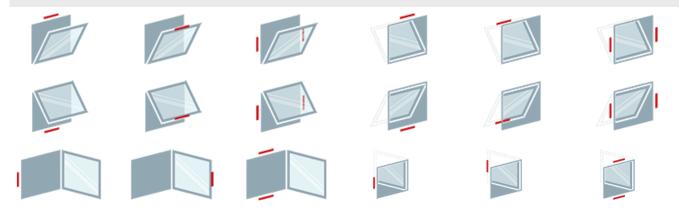

TECHNICAL DATA

Matchcode EA-L-450/750

Linear actuator EA-L-450/750 Article name

Part number M2 1007 Input voltage 24 V DC Nominal current 0.5

Input voltage range - 15 % / + 15 %

Stroke 750 Push force 450 Pull force 450 Nominal locking force 1000

Cut-Off electronic and sequence signal "F"

Running speed 5 IP code **IP54** Switch on duration 30

Mounting way aufgesetzt

Weight 2.85

Housing end-to-end aluminium profile tube, anodized in

EV1

36

42 Ш

Housing type Aluminium Colour On request 1113 Housing length

Housing width Housing height Appliance class



Linear actuator EA-L-450/750

Connection cable

Nominal working temperature Environment temperature range Brackets included Silicone cable 3 x 0.75 mm², light gray, length 3,000 mm 20 -5 $^{\circ}$ C - 75 $^{\circ}$ C nein

ACCESSO	RIES
----------------	-------------

Part no.	Matchcode
<u>K2 1501</u>	<u>OK</u>
<u>K2 1502</u>	<u>DAS</u>
<u>K2 1505 A</u>	<u>UKU-740</u>
<u>K2 1506</u>	AW 100-6
K2 1506 A	AW 100-6-A
K2 1507 A	AW 150-6
K2 1507 B	AW 150-6-A
K2 1519 A	AW 250-6
K2 1539	<u>HK-L</u>
<u>K2 1562</u>	<u>UK-L</u>
<u>K2 1563</u>	<u>K-L-UK-J</u>