


## Technical Data



Input voltage	24 V DC
Nominal current	0.5
Running speed	5
IP code	IP54
Switch on duration	30

## MOUNTING POSITIONS

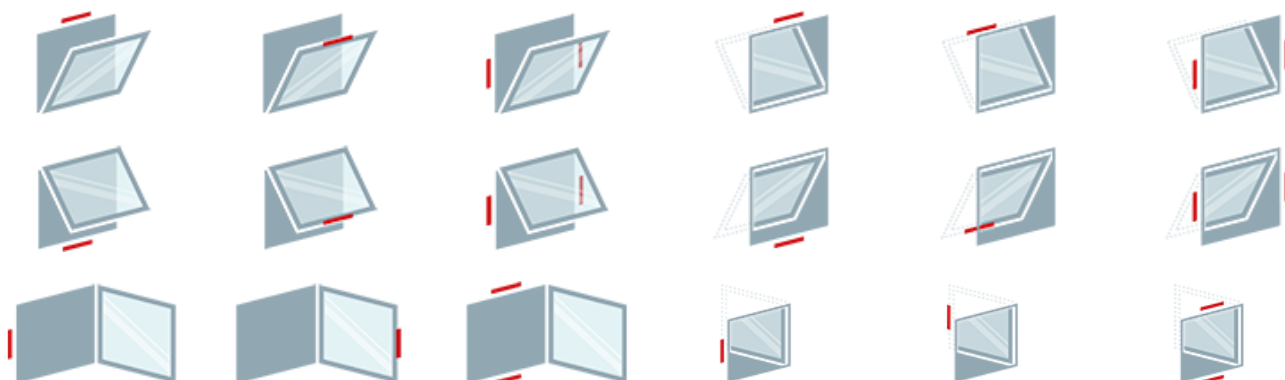

## TECHNICAL DATA

Matchcode	EA-L-450/1000
Article name	Linear actuator EA-L-450/1000
Part number	M2 1008
Input voltage	24 V DC
Nominal current	0.5
Input voltage range	- 15 % / + 15 %
Stroke	1000
Push force	450
Pull force	450
Nominal locking force	1000
Cut-Off	electronic and sequence signal "F"
Running speed	5
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	3.55
Housing	end-to-end aluminium profile tube, anodized in EV1
Housing type	Aluminium
Colour	On request
Housing length	1363
Housing width	36
Housing height	42
Appliance class	III

Connection cable	Silicone cable 3 x 0.75 mm <sup>2</sup> , light gray, length 3,000 mm
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein

## ACCESSORIES

Part no.	Matchcode	
<a href="#">K2 1501</a>	<a href="#">OK</a>	
<a href="#">K2 1502</a>	<a href="#">DAS</a>	
<a href="#">K2 1505 A</a>	<a href="#">UKU-740</a>	
<a href="#">K2 1506</a>	<a href="#">AW 100-6</a>	
<a href="#">K2 1506 A</a>	<a href="#">AW 100-6-A</a>	
<a href="#">K2 1507 A</a>	<a href="#">AW 150-6</a>	
<a href="#">K2 1507 B</a>	<a href="#">AW 150-6-A</a>	
<a href="#">K2 1519 A</a>	<a href="#">AW 250-6</a>	
<a href="#">K2 1539</a>	<a href="#">HK-L</a>	
<a href="#">K2 1562</a>	<a href="#">UK-L</a>	
<a href="#">K2 1563</a>	<a href="#">K-L-UK-J</a>	
<a href="#">K2 1576</a>	<a href="#">K-L-RAICO105D-RE-9006 (rechts)</a>	
<a href="#">K2 1577</a>	<a href="#">K-L-RAICO105D-LI-9006 (links)</a>	
<a href="#">K2 1601</a>	<a href="#">K-L-A-LI-AW57RO</a>	
<a href="#">K2 1603</a>	<a href="#">K-L-A-RE-AW57RO</a>	