




## Technical Data



|                    |         |
|--------------------|---------|
| Input voltage      | 24 V DC |
| Nominal current    | 1.4     |
| Running speed      | 11      |
| IP code            | IP32    |
| Switch on duration | 30      |

## MOUNTING POSITIONS

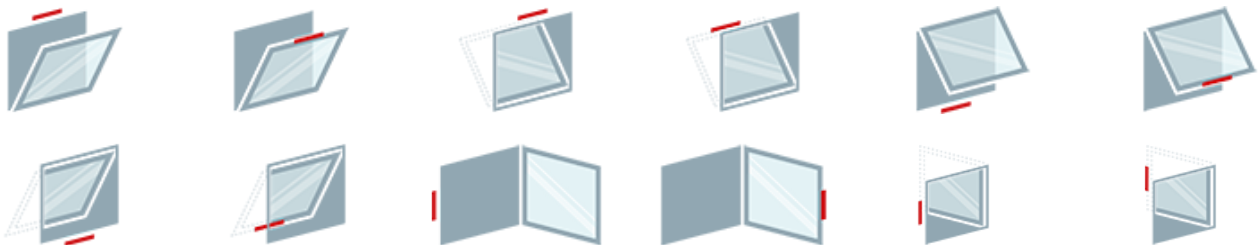

## TECHNICAL DATA

|                               |   |
|-------------------------------|---|
| Matchcode                     | PA-K-50/300-S   |
| Article name                  | Chain actuator PA-K-50/300-S                            |
| Part number                   | M2 2231 S   |
| Input voltage                 | 24 V DC   |
| Nominal current               | 1.4   |
| Input voltage range           | - 15 % / + 15 %   |
| Stroke                        | 300   |
| Push force                    | 500   |
| Pull force                    | 500   |
| Nominal locking force         | 700   |
| Cut-Off                       | Integrated electronic overload cut-off                  |
| Running speed                 | 11  |
| IP code                       | IP32  |
| Switch on duration            | 30  |
| Mounting way                  | aufgesetzt  |
| Weight                        | 1.81  |
| Housing                       | Aluminium profile housing EV1 anodized                  |
| Housing type                  | Aluminium   |
| Colour                        | On request  |
| Housing length                | 482   |
| Housing width                 | 50  |
| Housing height                | 41  |
| Appliance class               | III   |
| Connection cable              | SICO PLUG connection. Excluding connection cable / set. |
| Nominal working temperature   | 20  |
| Environment temperature range | -5 °C - 75 °C   |
| Brackets included             | nein  |

Customs tariff no

84798997

## ACCESSORIES

| Part no.                 | Matchcode                         |  |
|--------------------------|-----------------------------------|--|
| <a href="#">K2 5088</a>  | <a href="#">K-K50-SKI</a>         |  |
| <a href="#">K2 5089</a>  | <a href="#">K-K50-OK</a>          |  |
| <a href="#">K2 5090</a>  | <a href="#">K-K50-AKI</a>         |  |
| <a href="#">K2 5092</a>  | <a href="#">K-K50-A</a>           |  |
| <a href="#">K2 5093</a>  | <a href="#">K-K50-K</a>           |  |
| <a href="#">K2 5094</a>  | <a href="#">K-K50-FLEX</a>        |  |
| <a href="#">K2 5106</a>  | <a href="#">K-K-OK-SK</a>         |  |
| <a href="#">SD1 8513</a> | <a href="#">SICO-LINK-USB-110</a> |  |