




Technical Data



| | |
|--------------------|---------|
| Input voltage | 24 V DC |
| Nominal current | 0.5 |
| Running speed | 5 |
| IP code | IP54 |
| Switch on duration | 30 |

MOUNTING POSITIONS

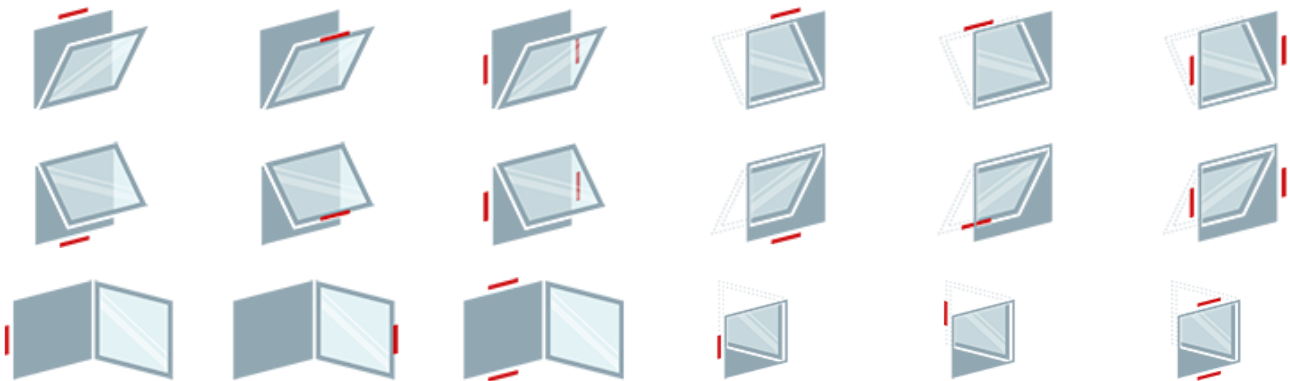

TECHNICAL DATA

| | |
|-----------------------|--|
| Matchcode | EA-L-450/750 |
| Article name | Linear actuator EA-L-450/750 |
| Part number | M2 1007 |
| Input voltage | 24 V DC |
| Nominal current | 0.5 |
| Input voltage range | - 15 % / + 15 % |
| Stroke | 750 |
| Push force | 450 |
| Pull force | 450 |
| Nominal locking force | 1000 |
| Cut-Off | electronic and sequence signal "F" |
| Running speed | 5 |
| IP code | IP54 |
| Switch on duration | 30 |
| Mounting way | aufgesetzt |
| Weight | 2.85 |
| Housing | end-to-end aluminium profile tube, anodized in EV1 |
| Housing type | Aluminium |
| Colour | On request |
| Housing length | 1113 |
| Housing width | 36 |
| Housing height | 42 |
| Appliance class | III |

| | |
|-------------------------------|---|
| Connection cable | Silicone cable 3 x 0.75 mm ² , light gray, length 3,000 mm |
| Nominal working temperature | 20 |
| Environment temperature range | -5 °C - 75 °C |
| Brackets included | nein |

ACCESSORIES

| Part no. | Matchcode |
|---------------------------|--|
| K2 1501 | OK |
| K2 1502 | DAS |
| K2 1505 A | UKU-740 |
| K2 1506 | AW 100-6 |
| K2 1506 A | AW 100-6-A |
| K2 1507 A | AW 150-6 |
| K2 1507 B | AW 150-6-A |
| K2 1519 A | AW 250-6 |
| K2 1539 | HK-L |
| K2 1562 | UK-L |
| K2 1563 | K-L-UK-J |
| K2 1576 | K-L-RAICO105D-RE-9006 (rechts) |
| K2 1577 | K-L-RAICO105D-LI-9006 (links) |
| K2 1601 | K-L-A-LI-AW57RO |
| K2 1603 | K-L-A-RE-AW57RO |