


Technical Data



Input voltage	24 V DC
Nominal current	0.5
Running speed	5
IP code	IP54
Switch on duration	30

MOUNTING POSITIONS

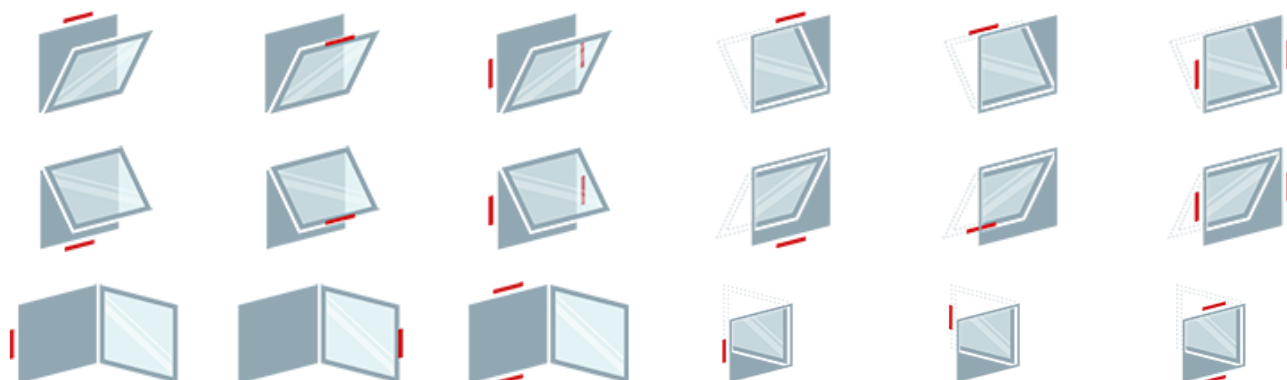

TECHNICAL DATA

Matchcode	EA-L-450/750
Article name	Linear actuator EA-L-450/750
Part number	M2 1007
Input voltage	24 V DC
Nominal current	0.5
Input voltage range	- 15 % / + 15 %
Stroke	750
Push force	450
Pull force	450
Nominal locking force	1000
Cut-Off	electronic and sequence signal "F"
Running speed	5
IP code	IP54
Switch on duration	30
Mounting way	aufgesetzt
Weight	2.85
Housing	end-to-end aluminium profile tube, anodized in EV1
Housing type	Aluminium
Colour	On request
Housing length	1113
Housing width	36
Housing height	42
Appliance class	III

Connection cable	Silicone cable 3 x 0.75 mm ² , light gray, length 3,000 mm
Nominal working temperature	20
Environment temperature range	-5 °C - 75 °C
Brackets included	nein

ACCESSORIES

Part no.	Matchcode	
K2 1501	OK	
K2 1502	DAS	
K2 1505 A	UKU-740	
K2 1506	AW 100-6	
K2 1506 A	AW 100-6-A	
K2 1507 A	AW 150-6	
K2 1507 B	AW 150-6-A	
K2 1519 A	AW 250-6	
K2 1539	HK-L	
K2 1562	UK-L	
K2 1563	K-L-UK-J	
K2 1576	K-L-RAICO105D-RE-9006 (rechts)	
K2 1577	K-L-RAICO105D-LI-9006 (links)	
K2 1601	K-L-A-LI-AW57RO	
K2 1603	K-L-A-RE-AW57RO	